


CONCRETE SUPPLY CHAIN BY CIFA



PRODUCT RANGE

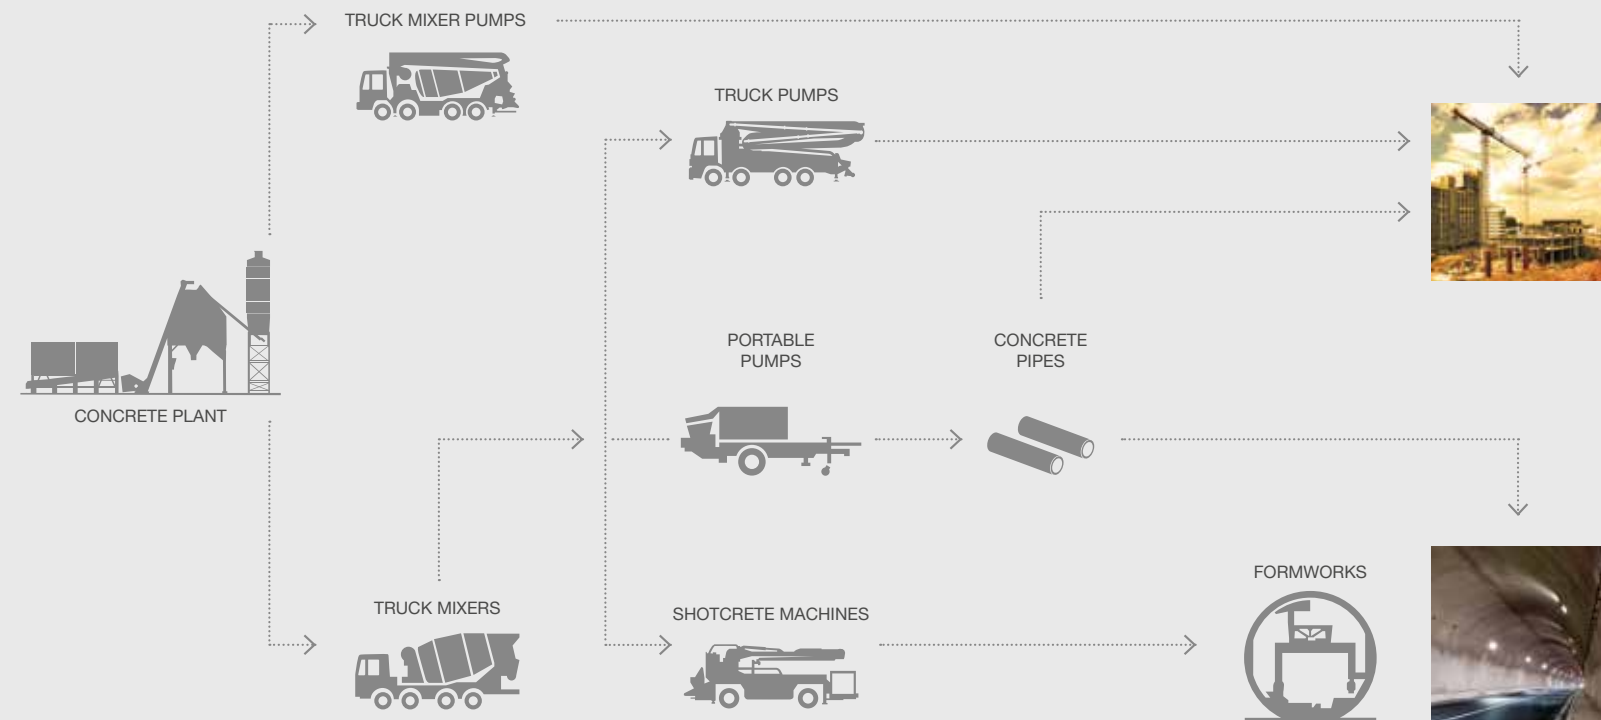

CIFA S.p.A. Via Stati Uniti d'America, 26 - 20030 SENAGO (MI)
Tel. +39 02 990 131 - sales@cifa.com



The catalogue shows models, outfitting versions and configuration possibilities (standard and optional) of machines for the production, transport and pumping of concrete, manufactured and distributed by CIFA SpA. The catalogue is intended for general information purposes only and the information it contains shall not be deemed a contractually binding document, since CIFA SpA may make constructive and outfitting modifications at any moment and during the period between publication of the catalogue, the production of the equipment and the publication of a more updated catalogue.

INFINITE SOLUTIONS

RESEARCH & INNOVATION


CERTIFIED QUALITY

PROFESSIONAL RANGE


SERVICE



ENERGYA SERIES



LESS CONSUMPTION
FEWER EMISSIONS




BETTER WORKING
CONDITIONS
HEALTHY
ENVIRONMENT



2 HOURS
RECHARGING TIME



PLUG-IN HYBRID TECHNOLOGY

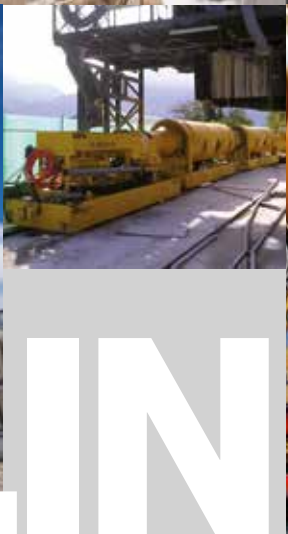

FULL LINE

TRUCK PUMPS CARBOTECH SERIES



K39H

BOOM HEIGHT: 38,1 m
BOOM SECTIONS: 5



K45H

BOOM HEIGHT: 44,1 m
BOOM SECTIONS: 5



K53H

BOOM HEIGHT: 52,1 m
BOOM SECTIONS: 5



K60H

BOOM HEIGHT: 59,1 m
BOOM SECTIONS: 6



K62H

BOOM HEIGHT: 61,3 m
BOOM SECTIONS: 6



K80H

BOOM HEIGHT: 79,5 m
BOOM SECTIONS: 7

PLUG-IN HYBRID TECHNOLOGY



CSSE

THEORETICAL OUTPUT (min - max): 5 - 30 m³/h
MAX PRESSURE ON CONCRETE: 65 bar



E8-9

NOMINAL CAPACITY: 8 - 9 m³

TRUCK PUMPS STEELTECH SERIES



K20L

BOOM HEIGHT: 19,75 m
BOOM SECTIONS: 4



K30L

BOOM HEIGHT: 29,7 m
BOOM SECTIONS: 4



K31L

BOOM HEIGHT: 30,5 m
BOOM SECTIONS: 5



K35L

BOOM HEIGHT: 34,4 m
BOOM SECTIONS: 5



K36L

BOOM HEIGHT: 35,6m
BOOM SECTIONS: 4



K37L

BOOM HEIGHT: 36,1 m
BOOM SECTIONS: 5



K38L

BOOM HEIGHT: 37,6 m
BOOM SECTIONS: 4



K42L

BOOM HEIGHT: 41,1 m
BOOM SECTIONS: 5



K48

BOOM HEIGHT: 47,2 m
BOOM SECTIONS: 6



K52L

BOOM HEIGHT: 51,1 m
BOOM SECTIONS: 6



K55L

BOOM HEIGHT: 54,3 m
BOOM SECTIONS: 5



K58L

BOOM HEIGHT: 57,1 m
BOOM SECTIONS: 6

TRUCK PUMPS CLASSIC SERIES



K36C
BOOM HEIGHT: 35,5 m
BOOM SECTIONS: 5



K38C
BOOM HEIGHT: 37,6 m
BOOM SECTIONS: 4



K40C
BOOM HEIGHT: 39,5 m
BOOM SECTIONS: 5



K41C
BOOM HEIGHT: 40,1 m
BOOM SECTIONS: 5



K49C
BOOM HEIGHT: 48,1 m
BOOM SECTIONS: 6



K56C
BOOM HEIGHT: 56 m
BOOM SECTIONS: 6



TRUCK MIXERS SL/SLX



SL/SLA 7-8-9
NOMINAL CAPACITY: 7-8 - 9 m³
with or without auxiliary engine



SL/SLA 10-12
NOMINAL CAPACITY: 10-12 m³
with or without auxiliary engine



EXTRA LIGHT SLX 8-9-10
NOMINAL CAPACITY: 8-9-10 m³

TRUCK MIXERS RY/SRY



RY/SRY 1100
NOMINAL CAPACITY: 10 m³
with or without auxiliary engine - FOR ITALIAN MARKET ONLY



RY/SRY 1300
NOMINAL CAPACITY: 12 m³
with or without auxiliary engine - FOR ITALIAN MARKET ONLY

TRUCK MIXERS HEAVY DUTY



HD/HDA 7
NOMINAL CAPACITY: 7 m³
with or without auxiliary engine



HD/HDA 8
NOMINAL CAPACITY: 8 m³
with or without auxiliary engine



HD/HDA 9
NOMINAL CAPACITY: 9 m³
with or without auxiliary engine



HD/HDA 10
NOMINAL CAPACITY: 10 m³
with or without auxiliary engine



HD 12+
NOMINAL CAPACITY: 12 (13) m³



HD 15
NOMINAL CAPACITY: 15 m³

TRUCK MIXER PUMPS



MK 24.4Z
BOOM HEIGHT: 23,5 m
BOOM SECTIONS: 3



MK 28L-4''
BOOM HEIGHT: 28,1 m
BOOM SECTIONS: 4



MK 28L-5''
BOOM HEIGHT: 28,1 m
BOOM SECTIONS: 4



MK 32L
BOOM HEIGHT: 31,2 m
BOOM SECTIONS: 4



MK 25H
BOOM HEIGHT: 24,2 m
BOOM SECTIONS: 4

CARBOTECH

PORTABLE PUMPS



SERIES 6 D/E
MAX THEORETICAL OUTPUT: 30-52 m³/h
MAX PRESSURE ON CONCRETE: 91-57 bar



SERIES 7-8 D/E
MAX THEORETICAL OUTPUT: 43-87 m³/h
MAX PRESSURE ON CONCRETE: 70-145 bar



PCC 907/612
THEORETICAL OUTPUT (HIGH/LOW): 56-87 m³/h
PRESSURE ON CONCRETE (HIGH/LOW): 116-73 bar

CONCRETE RECYCLING



CIFAWASH 10
OUTPUT (DILUTED CONCRETE): 10 m³/h

CITY PUMP



CITY PUMP UB 504
THEORETICAL OUTPUT (MIN-MAX): 34-51 m³/h
MAX PRESSURE ON CONCRETE (HIGH/LOW): 62-40 bar

BATCHING PLANTS




CIFAMOOVE 30
OUTPUT (VIBRATED CONCRETE): 30 m³/h



CIFAMOBILE 50
OUTPUT (VIBRATED CONCRETE): 50 m³/h



CIFAMOOVE 60
OUTPUT (VIBRATED CONCRETE): 60 m³/h

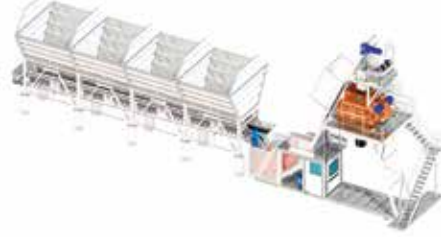

CIFAMOOVE 75-90
OUTPUT (VIBRATED CONCRETE): 75-90 m³/h



CIFAMOOVE 100
OUTPUT (VIBRATED CONCRETE): 95 m³/h



CIFAMIX 100 - 120
OUTPUT (VIBRATED CONCRETE): 100-120 m³/h

UNDERGROUND CONCRETE MACHINERY

CIFA IS A MEMBER OF:
EFNARC



SHOTCRETE CSS3 EVO
THEORETICAL OUTPUT (MIN - MAX): 5 - 30 m³/h
MAX PRESSURE ON CONCRETE: 65 bar



SHOTCRETE CSS3 CRAWLER
THEORETICAL OUTPUT (MIN - MAX): 3 - 25 m³/h
MAX PRESSURE ON CONCRETE: 50 bar



SHOTCRETE CST 8.20
THEORETICAL OUTPUT (MIN - MAX): 2 - 20 m³/h
MAX PRESSURE ON CONCRETE: 65 bar



SHOTCRETE PCS209 D/E
MAX THEORETICAL OUTPUT: 20 m³/h
MAX PRESSURE ON CONCRETE: 90 bar



MINING MIXER COGUARO 4
NOMINAL CAPACITY: 4 m³

FORMWORKS AND SPECIAL EQUIPMENT



CPC 506 E6 TRAIN PUMP
THEORETICAL OUTPUT 50 m³/h
MAX PRESSURE ON CONCRETE: 57 bar



SPECIAL EQUIPMENT



TRAIN MIXER
MC 40 EI: 4 m³
MC 60 EI: 6 m³
MC 80 EI: 8 m³
MC 100 EI: 10 m³



TUNNEL FORMWORKS
SOLUTION FOR ALL TYPE OF TUNNELS' SECTIONS:
SELF REACTING, SELF SUPPORTING, TELESCOPIC
FULL ROUND, NEEDLE BEAMCROSS PASSAGE



SEGMENT MOULD



PORT BLOCKS FORMWORKS